



TREND  
your pool  
**Aquatica**  
Summer  
Special



**TREND**<sup>®</sup>

*Born with style*



BULGARI HOTEL  
MILAN, ITALY




INTERCONTINENTAL HOTEL  
DAVOS, SWITZERLAND



THE LIBRARY RESORT,  
KOH SAMUI, THAILAND



MANDARIN ORIENTAL HOTEL  
PARIS, FRANCE

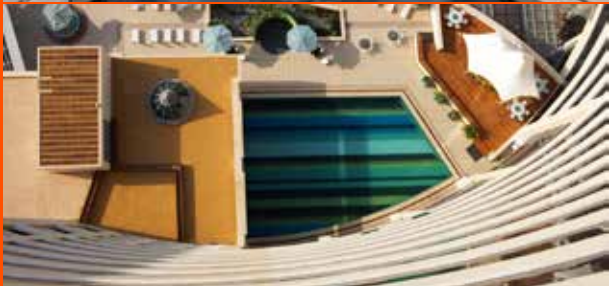

HOTEL MISSONI  
KUWAIT



FOUR SEASONS HOTEL  
ABU DHABI, UAE



HOTEL VICTOR  
MIAMI BEACH, FL, USA



# TREND YOUR POOL

The TREND Group was born by the hand of Pino Bisazza who, together with several qualified colleagues, created in the year **2000** an enterprise that blends the **artistic Italian tradition** with a **respect for nature**, and the **most innovative technologies** - a company that now boasts of hundreds of employees all around the world.

What makes TREND the excellent, devoted company it is today is its commitment to detail in the creation of aesthetical environments, built with the best technology and an eco-friendly, innovative system.

TREND glass mosaic dialogues with the brightness of the sky and the water. A classic covering, elegant and discreet, integrated in the surrounding environment in landscape swimming pools, or emphasized, playful and scenic in designer swimming pools, the TREND mosaic guarantees quality, long life, resistance, easy maintenance, making a swimming pool really valuable, a real investment.

TREND has demonstrated a unique ability to synthesize the essential principles of its Italian tradition with the dynamic creativity of today's most celebrated designers, architects and artists.



Crown Towers, Western Australia

Australia Sale Office:  
**Call 02 8817 5500**  
info-au@trend-group.com




Costa Navarino Resort, Messinia, Greece

## TREND OTHER MAJOR PROJECTS AROUND THE WORLD:

St. Peter's Basilica, Vatican  
St. Mark's Basilica, Venice, Italy  
Westminster Cathedral, London, UK  
Sagrada Familia, Barcelona, Spain  
Basilica of the National Shrine of the Immaculate Conception in DC, USA  
Nine Columns in La Biennale, Venice, Italy  
Clock Royal Tower, Makkah, UAE  
"Mosaic Maddox", London, UK  
Galleria Vittorio Emanuele II, Milan  
Trocadero, Paris, France  
L'Opera and Le Sacre-Coeur, Paris, France  
Doha Theater, Qatar  
The Detroit Institute of Art, USA  
Bund 18, Shanghai, China  
Moschea, Abu Dhabi, UAE  
Lennox Head Cultural Centre, Australia  
Domus Orsoni Hotel, Venice, Italy  
Grande Real Villa Italia Hotel, Cascais, Portugal  
Urban Hotel, Madrid, Spain  
Les Lodges Sainte-Victoire Hôtel, Aix-En-Provence, France  
Four Seasons Hotel Abu Dhabi, UAE  
Hotel Park Hyatt Vendôme, Paris, France

# TREND PLUS+

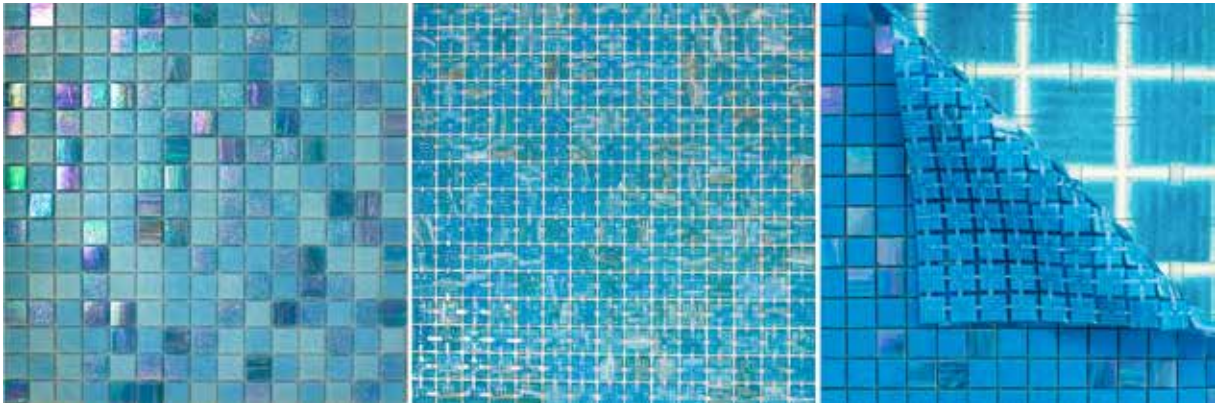

## **TREND PLUS+ pre-mounted support 316 x 316 mm sheets (10 sheets/sqm) are the ultimate solution for fast and easy installation.**

TREND PLUS+ pre-mounted support represents the best solution for the installation of the mosaic in any environment, including where there's direct contact with water as in steam baths and swimming pools. TREND PLUS+ pre-mounted support meets CSIRO ISO 13007-1:2004, the minimum requirements for tensile strength after water immersion. The system is deemed to meet the minimum requirements for tensile strength for wet adhesion.

TREND PLUS+ pre-mounted support is an innovative technology with polyurethane reactive (PUR) pre-mounted rear support, solvent free and non-flammable for glass mosaic sheets. TREND PLUS+ pre-mounted support: 90+ percent of bonding surface available as recommended by the Australian Standards; TREND ensures that THE FILLING OF THE GROUT VOID IS 100% UNOBSTRUCTED by our Polyurethane PLUS pre-mounted support. The PLUS pre-mounted support is 100% UV stable Polyurethane and does not expand or contract in submerged situations.

TREND PLUS+ pre-mounted support guarantees maximum flexibility of the sheets while ensuring stable and secure support during installation without detaching of the tiles. It can be used with any bonding and is the best solution for the installation of the mosaic in any environment: outdoor, indoor, swimming pools, etc.

\* Use a 4 x 4 mm notched trowel for installation

All ranges of TREND mosaics are also available in film face support for an absolute 100% of bonding surfaces back and grout sides of the tiles.

ITALIAN DESIGN ◦ MODERN  
ANGULAR & GEOMETRIC ◦ FLAWLESS EDGES  
LONG STRAIGHT LINES ◦ CLEAR-CUT  
SQUARE ◦ ELEGANT

# GROUT-LOCK SYSTEM

## TREND'S INNOVATIVE GROUT LOCK SYSTEM:

The DIAMOND PROFILE of the tile is designed to trap the filling grout; an ingenious design intended as a definitive solution to the 'popping' grout issue of sub-standard basic straight up side profile tiles.

TREND PLUS+ pre-mounted support is CSIRO ISO 13007-1:2004 certified: the system deemed to meet the minimum requirements for tensile strength for wet adhesion.

TREND PLUS+ pre-mounted support is the FIRST mosaic with back support DIN EN 1348-2007 CERTIFIED by GERMAN SAURO FLIESNER-VEREINIGUNG E. V. for use in swimming pools.

## TREND GUARANTEE


TREND Group is one of few organisations of the industry that wholly owns, manufactures and distributes its goods directly to 50+ countries and counting. This ownership guarantees the highest level of product and service quality throughout three production facilities, five assembly units and six offices located across four continents.

## CERTIFIED POOL SAFE

100% TREND Owned  
100% TREND Manufactured  
100% TREND Distributed

TREND  *Beau with style*

PLUS  
pre-mounted support



GROUT LOCK  
SYSTEM



ISO  
13007-1:2004



CSIRO



DIN EN  
1348-2007



Australian Tile Council Inc.

Leading the Industry


TTIAA  
Tiles & Tiling Industry Association Australia

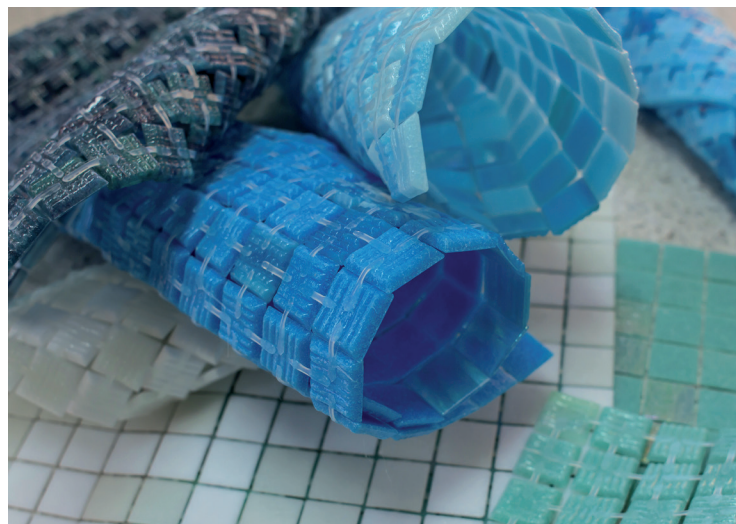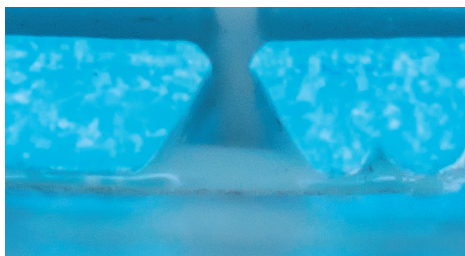




# VITREO 2x2 cm


120

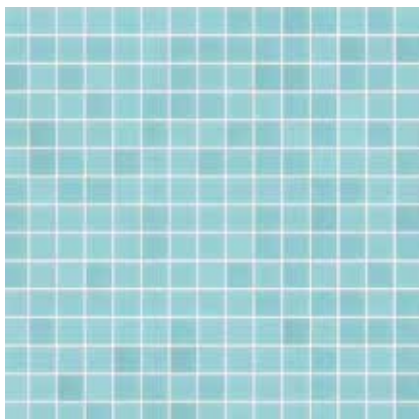


121

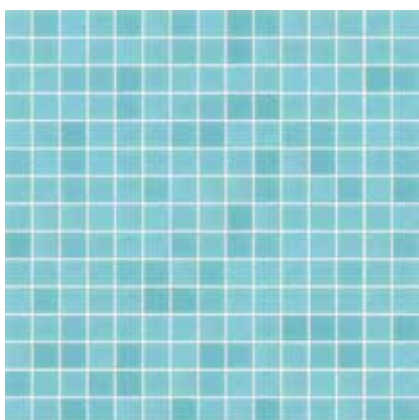


122

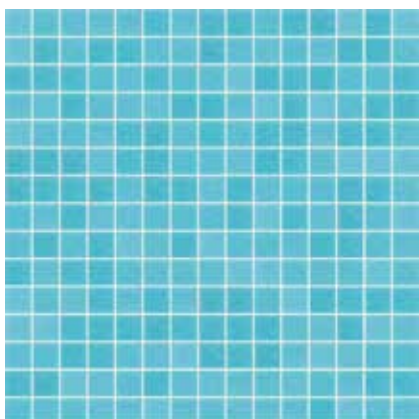


123

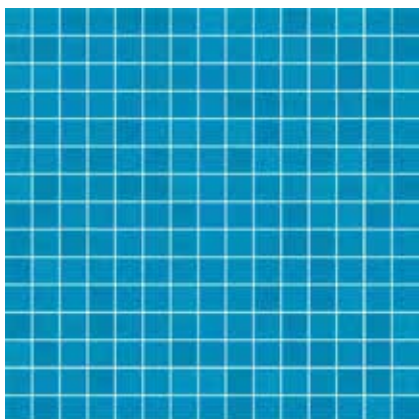

130

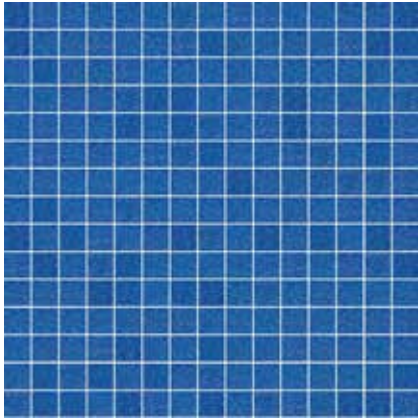


110

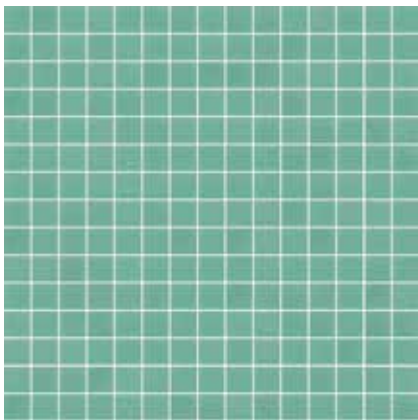

160



152

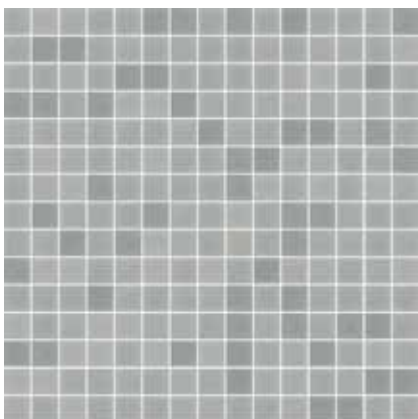

PLUS pre-mounted support - Tiles 20 x 20 x 4 mm - Sheets 316 x 316 mm




GROUT LOCK system




# VITREO & SHINING 2x2 cm

208

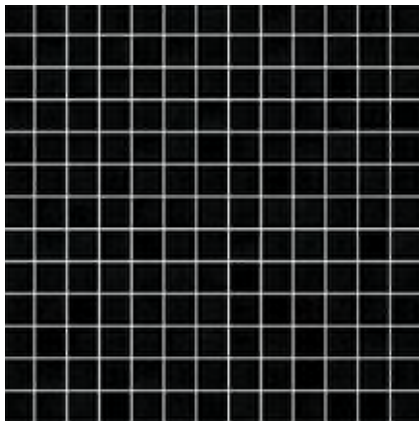


BIARRITZ

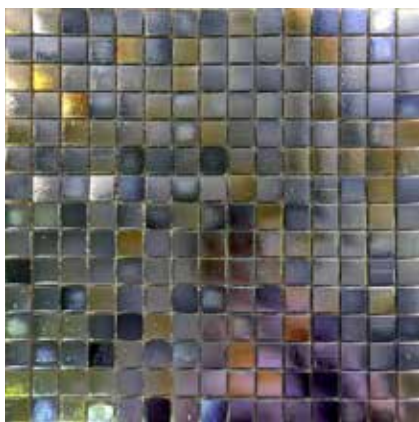



# BRILLANTE 2x2 cm


244

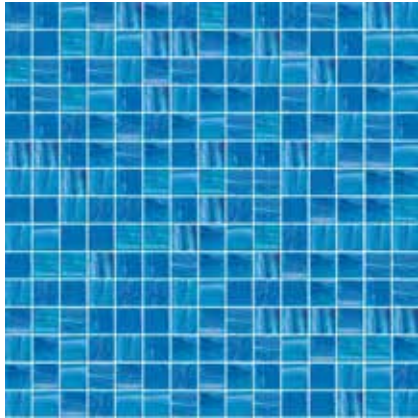


245



249

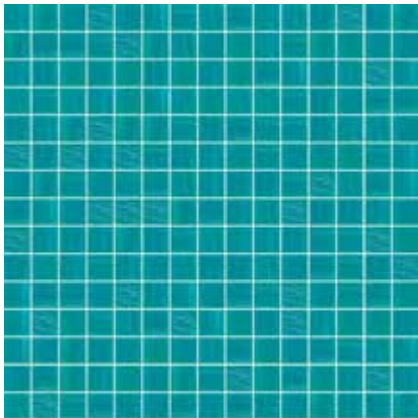


239

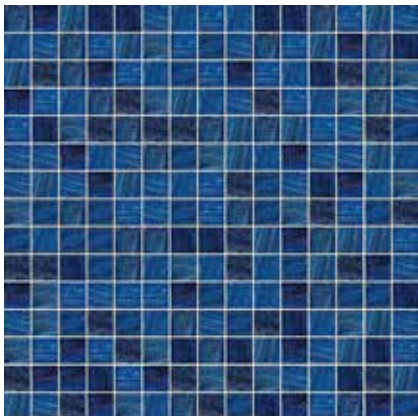






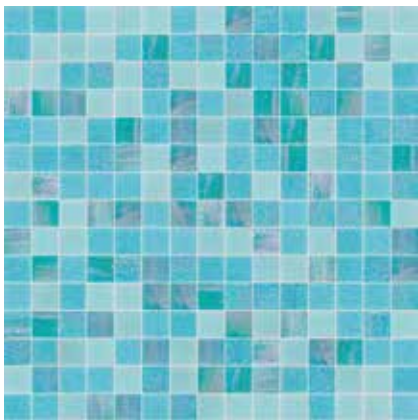
# MIXES 2 x 2 cm

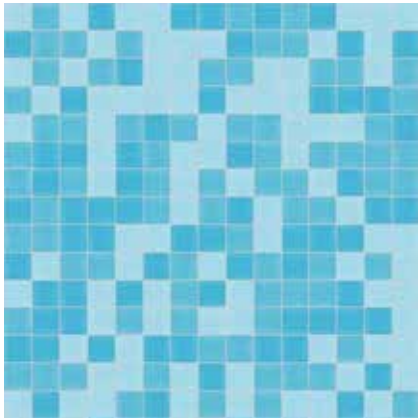



## TROPICAL SUN




- 120 (33%) 
- 121 (33%) 
- 122 (34%) 



## AZZURRO MEDITERRANEO




- 120 (30%) 
- 121 (30%) 
- 722 (20%) 
- 841 (20%) 

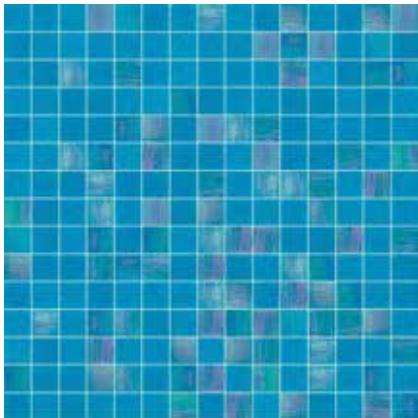



## MARE NOSTRUM

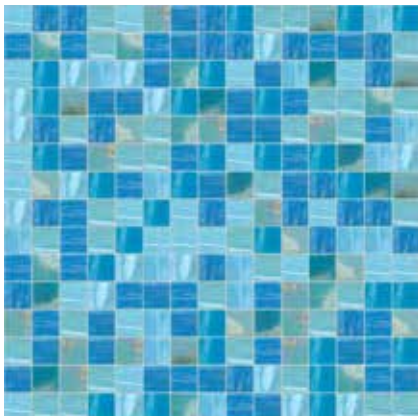

- 123 (70%) 
- 843 (30%) 


## WAHOO



- 241 (35%) 
- 243 (45%) 
- 841 (10%) 
- 843 (10%) 




**RELAXATION**

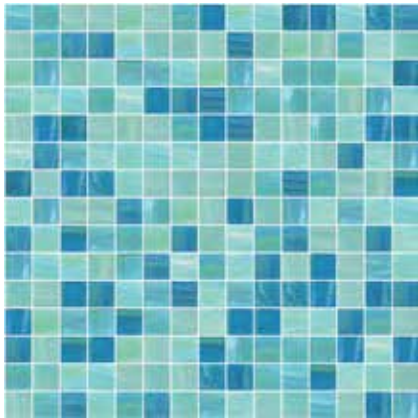

- 232 (25%)
- 247 (25%)
- 249 (25%)
- 251 (25%)




**SPLASH**

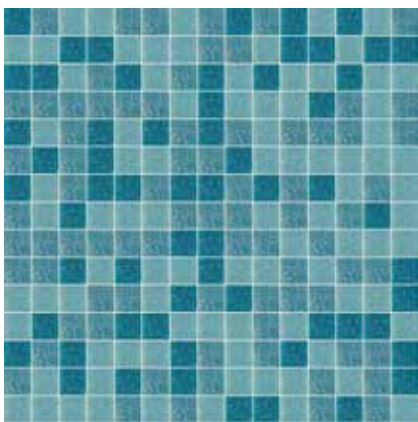

- 140 (33%)
- 141 (33%)
- 142 (33%)



**AQUA TROPICALE**

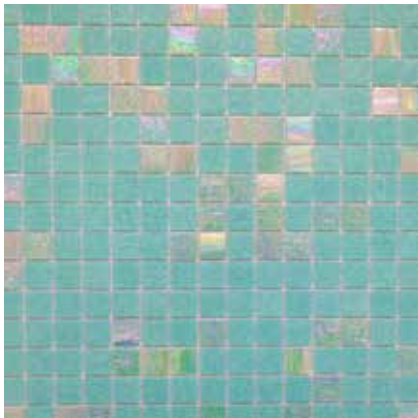

- 111 (70%)
- 711 (20%)
- 851 (10%)



**SNOWFLAKE**



- 160 (50%)
- 2100 (50%)



PLUS pre-mounted support - Tiles 20 x 20 x 4 mm - Sheets 316 x 316 mm




GROUT LOCK system




# MIXES 2x2 cm

## BLUE MOUNTAINS

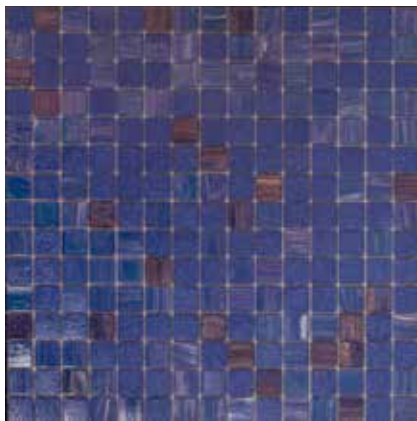

- TP133 (10%)
- TP146 (40%)
- 130 (50%)

## WAVY

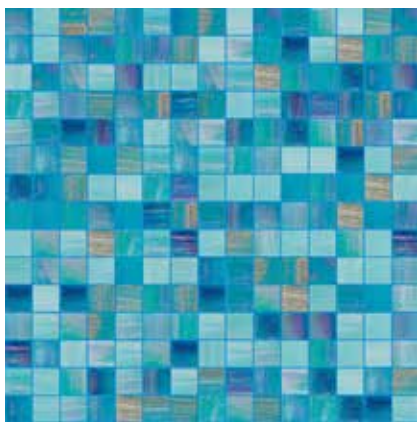


- 240 (20%)
- 242 (20%)
- 841 (20%)
- 843 (20%)
- 844 (20%)

## BLUE SHELL



- 722 (80%)
- 843 (20%)

## TP 136

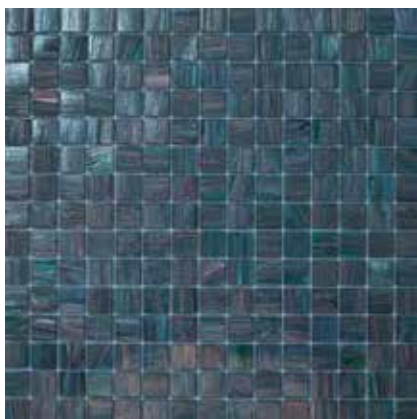



# GOLD 2 x 2 cm

## YELLOW 24K GOLD



On FILMFACE, available on PLUS upon request



## YELLOW 24K GOLD



## WHITE 24K GOLD



On FILMFACE, available on PLUS upon request




## WHITE 24K GOLD




# HEXAGONAL 3 x 3,5 cm


HEX 242

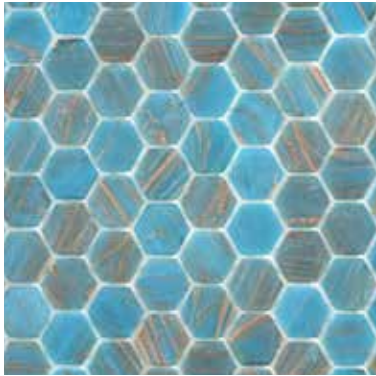


HEX 244

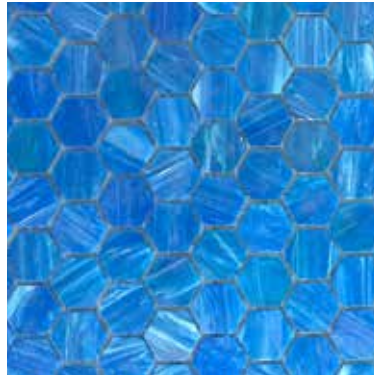

HEX 239

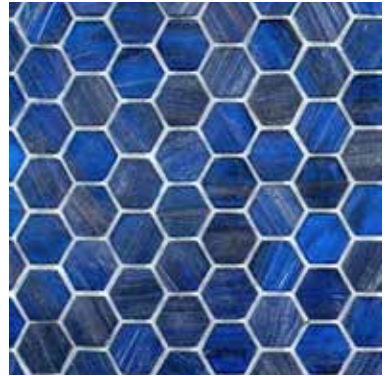

HEX 245

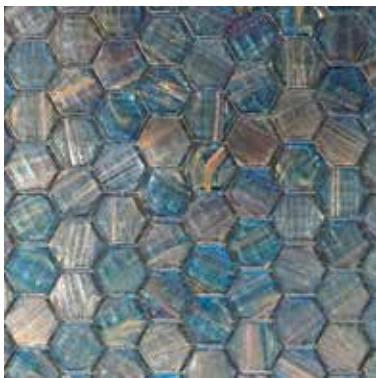


HEX 236



HEX 208



 PLUS pre-mounted support - Tiles 30 x 35 x 5 mm - Sheets 326 x 350 mm  GROUT LOCK system







HEX 160




HEX 150

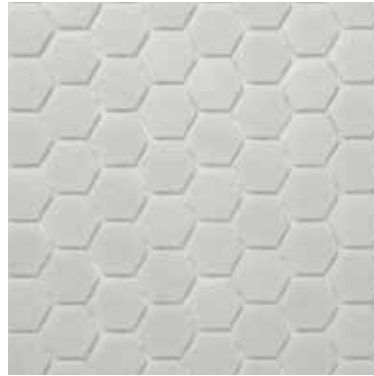


HEX 152

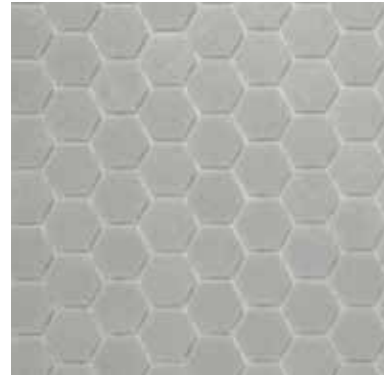


HEX 2102

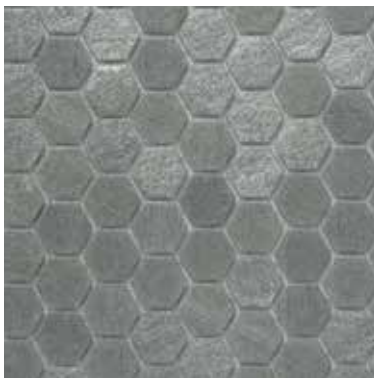

HEX 154

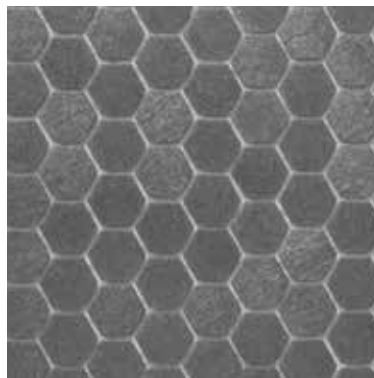

HEX 2104

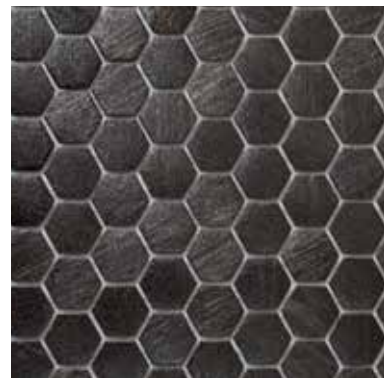


HEX 182



HEX 2120



HEX 2124

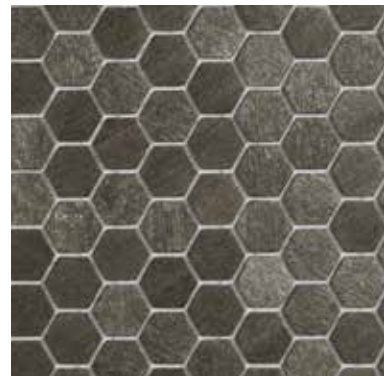

HEX 222



HEX 282



HEX 270









# RECTANGULAR 2 x 4 cm

RECT 222



RECT 282



RECT 236



RECT 270



RECT 242



RECT 239











# MOSAIC 1 x 1 cm

160

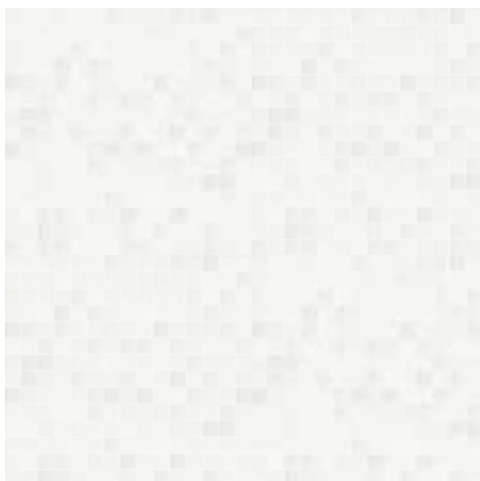


GYPSUM

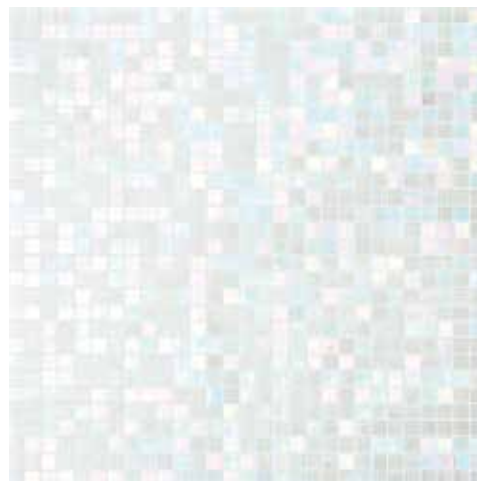


280  
760

153

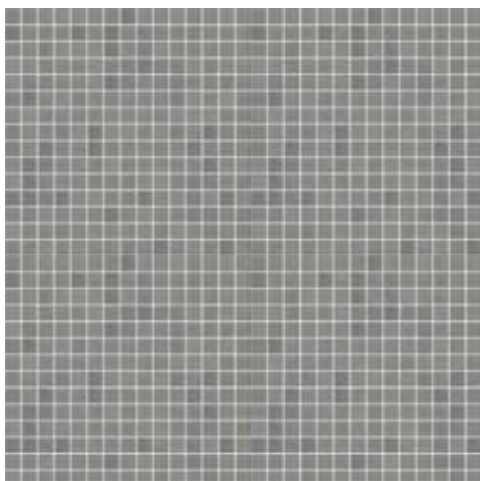


MOKAITE

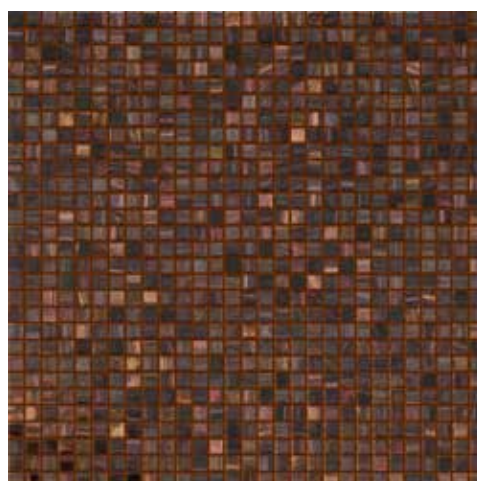


223  
228  
270

208

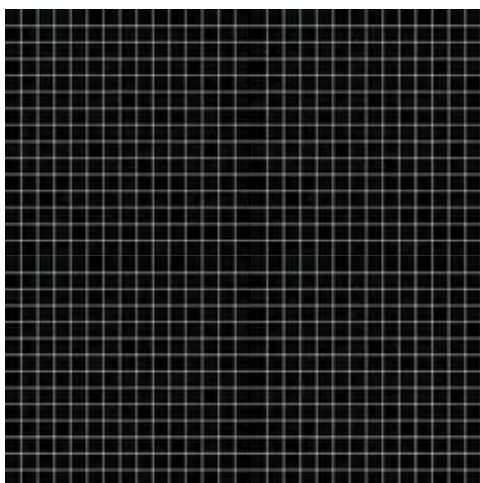

HEMATITE

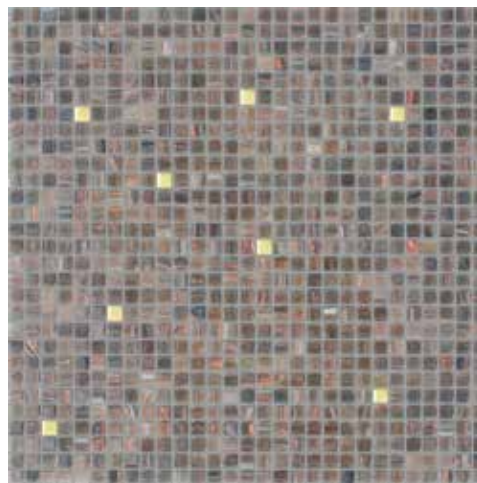

024  
025  
218







# MOSAIC 4 x 4 cm

245



TP 136



TP 133



242



239









# MOSAIC 4 x 4 cm

280



282



216




218



260





2104

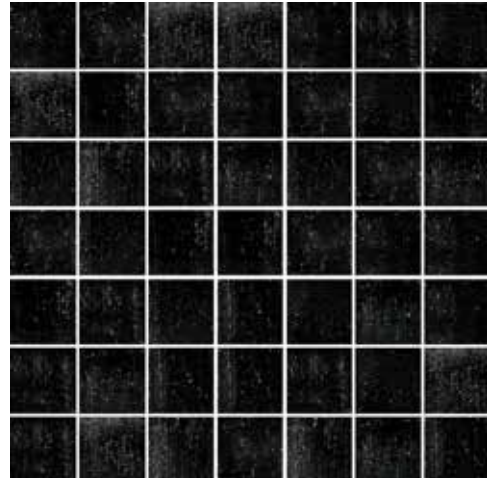



# CUSTOMIZED DESIGN

At TREND we offer to the architectural/ landscape market an exclusive service to design project pools and artwork for public and private spaces. Anything can be created with a commitment to detail and high end workmanship. Contact us for further information.

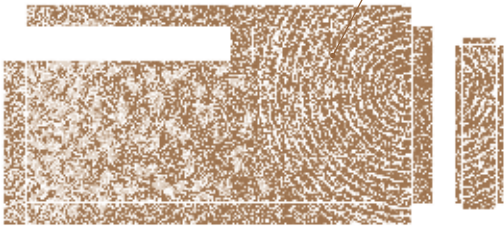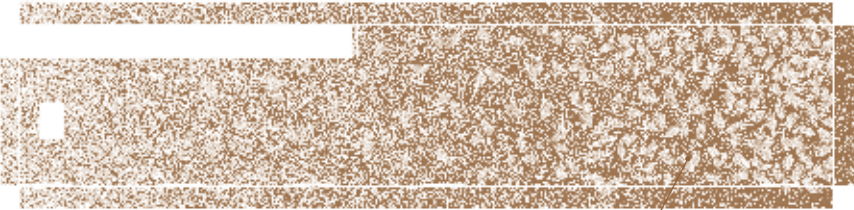

CAD CUSTOM DESIGN








CAD CUSTOM DESIGN




ARTISTIC CUSTOM DESIGN

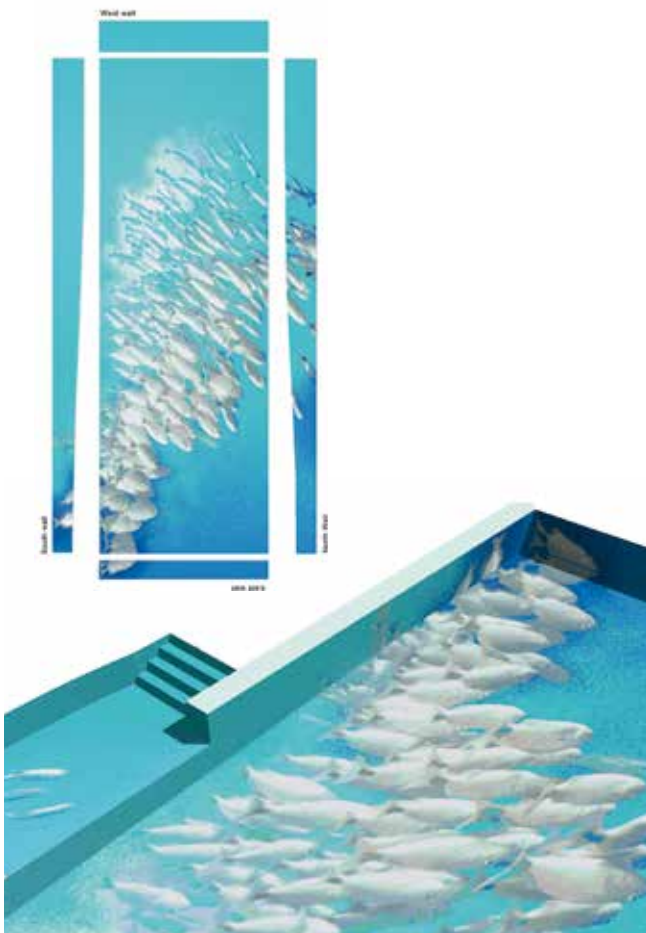





# SHADING BLENDS

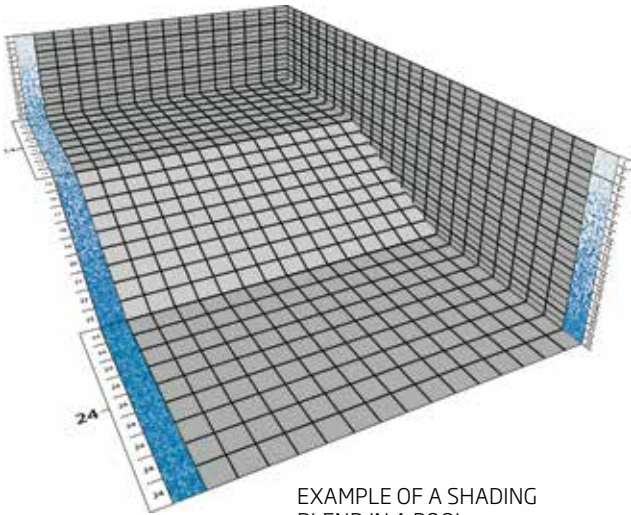


EXAMPLE OF A SHADING BLEND IN A POOL

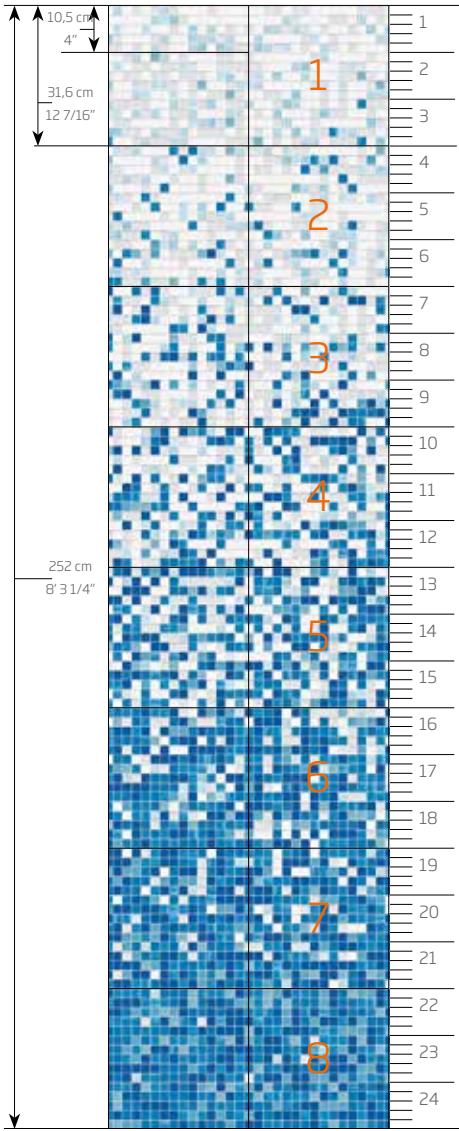

EUCALIPTUS

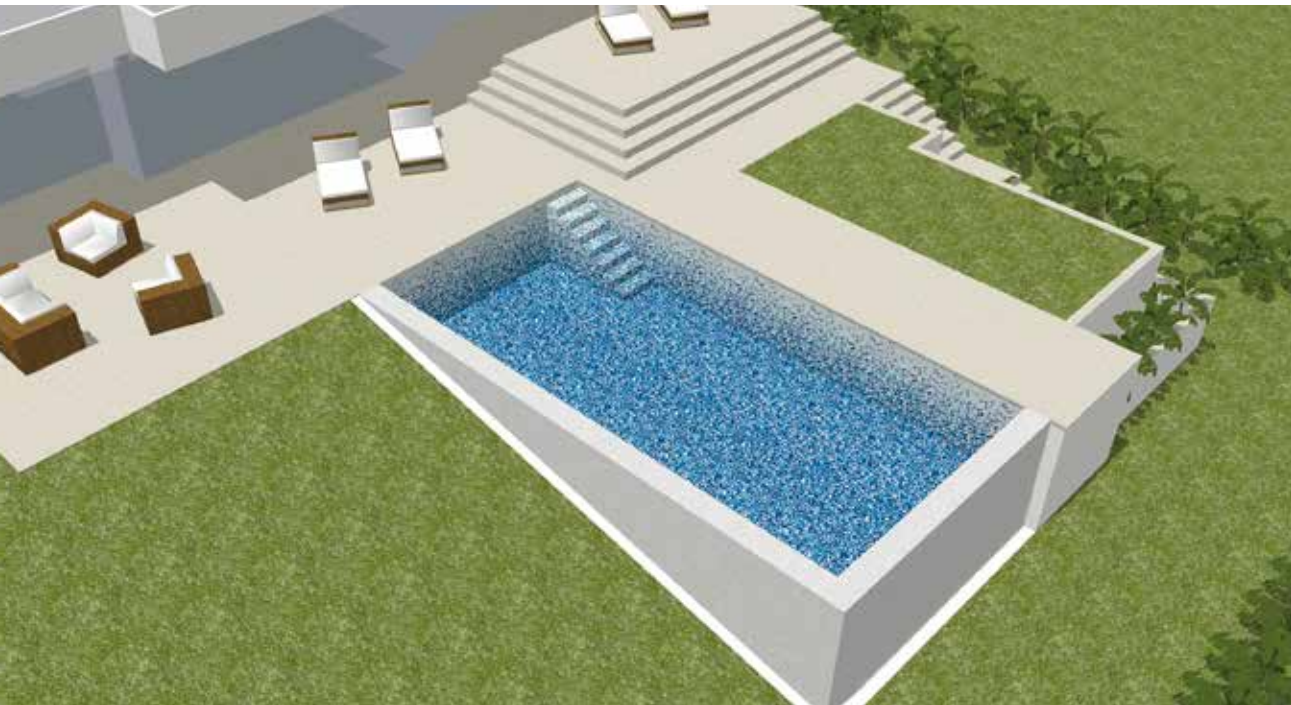




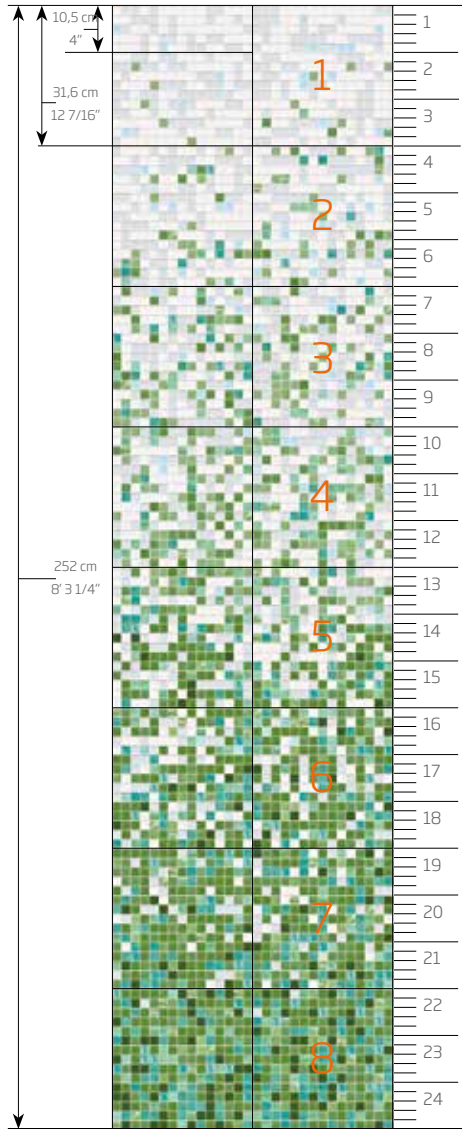

JASMIN



EXAMPLE OF A SHADING BLEND IN THE STEPS OF A SWIMMING POOL

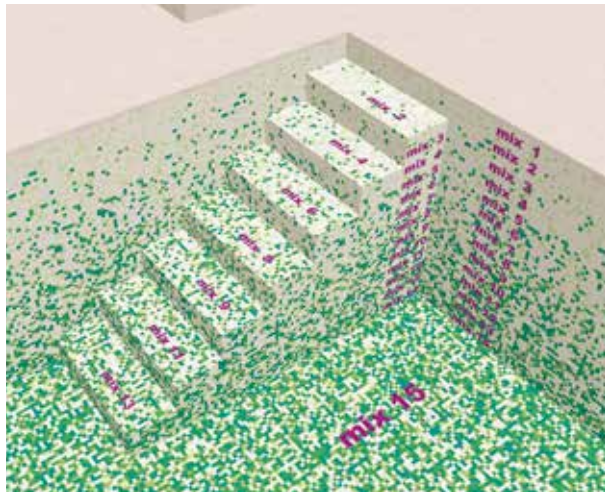

# TECHNICAL INFORMATION

## VITREO | BRILLANTE | SHINING | FEEL ( 2 x 2 cm | 1 x 1 cm)








### WEIGHT AND DIMENSIONS

SIZE	2 x 2 cm   3/4" x 3/4" 1 x 1 cm   3/8" x 3/8"
THICKNESS	~ 4 mm   5/32"
SHEET SIZE	31,6 x 31,6 cm 12 7/16" x 12 7/16"
JOINT	~ 1 mm   2/48"
WEIGHT	~ 7 kg/m <sup>2</sup>   1.6 lbs/SQF
QUANTITY PER CARTON	2 m <sup>2</sup>   21.528 SQF
CARTONS PER PALLET	72
PALLET WEIGHT	~ 1030 Kg   ~ 2266 lb

### TEST ASTM

TEST PERFORMED AND REQUIREMENTS	CONCLUSIONS
Range of thickness (ASTM C499)	passes
Facial dimensions (ASTM C499)	passes
Wedging (ASTM C502)	passes
Water absorption (ASTM C373)	passes
Thermal shocks (ASTM C484)	passes
Bond Strength (ASTM C482)	passes

### TEST DATA

	UNI EN ISO 10545 (13) RESISTANCE TO CHEMICAL AGENTS <b>RESISTANT</b>
	ASTM C 484 UNI EN ISO 10545 (9) THERMAL SHOCKS RESISTANCE <b>RESISTANT</b>
	UNI EN ISO 10545 (3) WATER ABSORPTION <b>NONE</b>
	DIN 51094 COLOURS RESISTANCE TO FADING <b>RESISTANT</b>
	UNI EN ISO 10545 (12) FROST RESISTANCE <b>RESISTANT</b>
	DIN 51097 SLIP RESISTANCE ON BARE FEET <b>CLASS C</b>
	DIN 51130 SLIP RESISTANCE WITH SHOES <b>R9</b>

### VITREO GRIP | SPECIAL PROCESSING | 2 x 2 cm

COLOURS: 101 | 104 | 105 | 107 | 109 | 110 | 111 | 113 | 115 | 116 | 117 | 119 | 120 | 121 | 122 | 123 | 130 | 131 | 132 | 135 | 136 | 137 | 138 | 140 | 142 | 150 | 152 | 153 | 154 | 155 | 160 | 161 | 163 | 165 | 166 | 167 | 169 | 170 | 171 | 172 | 173 | 180 | 181 | 182 | 183



DIN 51097  
SLIP RESISTANCE ON BARE FEET  
**CLASS C**



DIN 51130  
SLIP RESISTANCE WITH SHOES  
**R11**

## HEXAGONAL








### WEIGHT AND DIMENSIONS

SIZE	3,5 x 3 cm   1 3/16" x 1 3/8"
THICKNESS	~ 5 mm   3/16"
SHEET SIZE	32,6 x 35,0 cm 12 27/32" x 13 25/32"
MODULAR SIZE	28,4 x 29,6 cm 11 3/16" x 11 21/32"
JOINT	~ 2 mm   2/48"
WEIGHT	~ 9 kg/m <sup>2</sup>   1.84 lbs/SQF
QUANTITY PER CARTON	1.411 m <sup>2</sup>   15.177 SQF
CARTONS PER PALLET	72
PALLET WEIGHT	~ 1000 Kg   ~ 2204.62 lb

### TEST ASTM

TEST PERFORMED AND REQUIREMENTS	CONCLUSIONS
Range of thickness (ASTM C499)	passes
Facial dimensions (ASTM C499)	passes
Wedging (ASTM C502)	passes
Water absorption (ASTM C373)	passes
Thermal shocks (ASTM C484)	passes
Bond Strength (ASTM C482)	passes

### TEST DATA

	UNI EN ISO 10545 (13) RESISTANCE TO CHEMICAL AGENTS <b>RESISTANT</b>
	ASTM C 484 UNI EN ISO 10545 (9) THERMAL SHOCKS RESISTANCE <b>RESISTANT</b>
	UNI EN ISO 10545 (3) WATER ABSORPTION <b>NONE</b>
	DIN 51094 COLOURS RESISTANCE TO FADING <b>RESISTANT</b>
	UNI EN ISO 10545 (12) FROST RESISTANCE <b>RESISTANT</b>
	DIN 51097 SLIP RESISTANCE ON BARE FEET <b>CLASS B</b>
	DIN 51130 SLIP RESISTANCE WITH SHOES <b>R9</b>



## RECTANGULAR








### WEIGHT AND DIMENSIONS

SIZE	2 x 4 cm   3/4" x 1 1/2"
THICKNESS	~ 4 mm   5/32"
SHEET SIZE	29,3 x 29,5 cm 11 1/2" x 11 5/8"
JOINT	~ 1 mm   2/48"
WEIGHT	~9 kg/m <sup>2</sup>   1.84 lbs/SQF
QUANTITY PER CARTON	20 sheets
CARTONS PER PALLET	72
PALLET WEIGHT	867 kg

### TEST ASTM

TEST PERFORMED AND REQUIREMENTS	CONCLUSIONS
Range of thickness (ASTM C499)	passes
Facial dimensions (ASTM C499)	passes
Wedging (ASTM C502)	passes
Water absorption (ASTM C373)	passes
Thermal shocks (ASTM C484)	passes
Bond Strength (ASTM C482)	passes

### TEST DATA

	UNI EN ISO 10545 (13) RESISTANCE TO CHEMICAL AGENTS <b>RESISTANT</b>
	ASTM C 484 UNI EN ISO 10545 (9) THERMAL SHOCKS RESISTANCE <b>RESISTANT</b>
	UNI EN ISO 10545 (3) WATER ABSORPTION <b>NONE</b>
	DIN 51094 COLOURS RESISTANCE TO FADING <b>RESISTANT</b>
	UNI EN ISO 10545 (12) FROST RESISTANCE <b>RESISTANT</b>
	DIN 51097 SLIP RESISTANCE ON BARE FEET <b>CLASS B</b>
	DIN 51130 SLIP RESISTANCE WITH SHOES <b>R9</b>

## 4 x 4 cm








### WEIGHT AND DIMENSIONS

SIZE	4 x 4 cm   1 1/2" x 1 1/2"
THICKNESS	~ 4 mm   5/32"
SHEET SIZE	29,3 x 29,3 cm
JOINT	~ 2 mm   2/48"
WEIGHT	~6 kg/m <sup>2</sup>
QUANTITY PER CARTON	1.716 sqm
CARTONS PER PALLET	72
PALLET WEIGHT	867 kg

### TEST ASTM

TEST PERFORMED AND REQUIREMENTS	CONCLUSIONS
Range of thickness (ASTM C499)	passes
Facial dimensions (ASTM C499)	passes
Wedging (ASTM C502)	passes
Water absorption (ASTM C373)	passes
Thermal shocks (ASTM C484)	passes
Bond Strength (ASTM C482)	passes

### TEST DATA

	UNI EN ISO 10545 (13) RESISTANCE TO CHEMICAL AGENTS <b>RESISTANT</b>
	ASTM C 484 UNI EN ISO 10545 (9) THERMAL SHOCKS RESISTANCE <b>RESISTANT</b>
	UNI EN ISO 10545 (3) WATER ABSORPTION <b>NONE</b>
	DIN 51094 COLOURS RESISTANCE TO FADING <b>RESISTANT</b>
	UNI EN ISO 10545 (12) FROST RESISTANCE <b>RESISTANT</b>
	DIN 51097 SLIP RESISTANCE ON BARE FEET <b>CLASS B</b>
	DIN 51130 SLIP RESISTANCE WITH SHOES <b>R9</b>

# SUGGESTED ADHESIVES

A IMPORTANT NOTICE: The substrates must be perfectly flat, smooth, ripe, firm, smooth and white

## WALLS AND FLOORING - INTERNAL AND EXTERNAL

SUBSTRATES	MANUFACTURER	ADHESIVE	CLASS	USE
Cement screeds, concrete, screeds, heaters, old ceramics, gypsum-based plaster*, cement-based plaster, plasterboard*, fibre cement panels, lightened concrete panels, cement finished foam core panels	LITOKOL LATICRETE MAPEI	LITOPUS K55 + LATEXKOL 254 PLATINUM ADESILEX P10 + ISOLASTIC	C2TES1 C2TES1 C2TES1	2,5 kg/mq
Wood	LITOKOL LATICRETE MAPEI	LITOEELASTIC LATALASTIK KERALASTIC T	R2T R2T R2T	2,0 kg/mq
Metal	LITOKOL LATICRETE LATICRETE MAPEI	LITOEELASTIC LATALASTIK LATAPOXY 300 KERALASTIC T	R2T R2T R2T R2T	2,0 kg/mq

\* After the application of primer

## POOL AND SPA

Cement plasters and levelling, concrete, cement screeds, cement waterproofing, cement finished foam core panels	LITOKOL LATICRETE MAPEI	LITOPUS K55 + LATEXKOL 254 PLATINUM ADESILEX P10 + ISOLASTIC	C2TES1 C2TES1 C2TES1	2,5 kg/mq
Metal (Always consult the technical department)	LITOKOL LATICRETE LATICRETE MAPEI	LITOEELASTIC LATALASTIK LATAPOXY 300 KERALASTIC T	R2T R2T R2T R2T	2,0 kg/mq

# RECOMMENDED GROUTING & DETERGENTS

IMPORTANT NOTICE: the joints must be of a thickness of at least 3 mm and a width of at least 1 mm Usage temperature between +12° and +30°C

## WALLS AND FLOORING - INTERNAL AND EXTERNAL

MANUFACTURER/ADHESIVE	TILE FORMAT	USE	DETERGENT	USE
TREND   MY KIT LITOKOL   STARLIKE KERAKOLL   FUGALITE (Only for internal use) MAPEI   KERAPOXY DESIGN	1 x 1 cm 2 x 2 cm HEXAGONAL	1,50 kg/mq 1,20 kg/mq 1,00 kg/mq	LITONET/LITONET GEL LITONET/LITONET GEL FUGASOAP EPOXY CLEANER	10-15 mq/Lt

## POOL AND SPA

TREND   MY KIT LITOKOL   STARLIKE KERAKOLL   FUGALITE (Only for internal use) MAPEI   KERAPOXY DESIGN	1 x 1 cm 2 x 2 cm HEXAGONAL	1,50 kg/mq 1,20 kg/mq 1,00 kg/mq	LITONET/LITONET GEL LITONET/LITONET GEL FUGASOAP EPOXY CLEANER	10-15 mq/Lt
--	-----------------------------------	--	---	-------------



trend-group.com

ITALY

Piazzale Fraccon 8  
36100 Vicenza | Italy  
phone +39 0444 338 711  
info-it@trend-group.com

USA

1565 NW 36th Street  
Miami, FL 33142 USA  
phone +1 863 655 0164  
toll free +1 866 508 7363  
info-us@trend-group.com

UK

Unit 28 Decimus Park,  
Kingstanding Way | Tunbridge  
Wells | Kent TN2 3GP | UK  
call 08700 427 450  
phone +44 01 892 509 690  
info-gb@trend-group.com

AUSTRALIA

Unit 16/167 Prospect Hwy  
Seven Hills, 2147  
Sydney NSW Australia  
phone +61 02 8817 5500  
info-au@trend-group.com

BRAZIL

Caçada das Violetas, 225  
Alphaville Comercial,  
Barueri | São Paulo,  
06453-003 | Brazil  
phone: +55 11 2424 6137  
info-br@trend-group.com

UNITED ARAB EMIRATES

402, Building 1-B  
Dubai Design District -D3, UAE  
P.O. Box 309127  
phone +971 44 30 9424  
info-ae@trend-group.com



**TREND<sup>®</sup>**

*Born with style*